


SERIE F

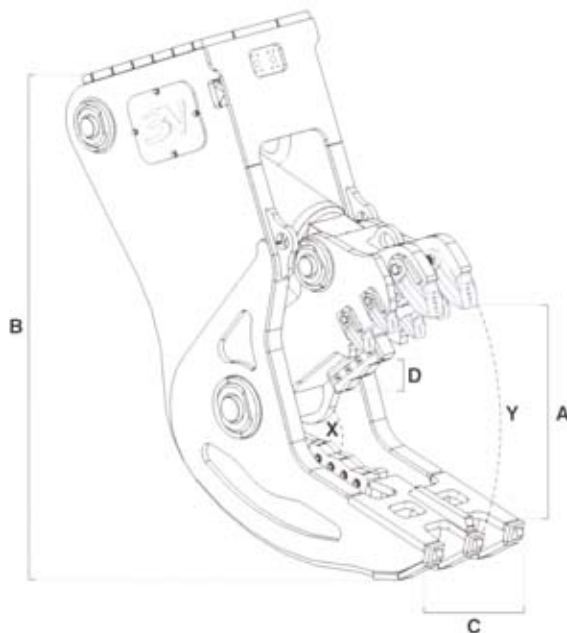

MODEL		F 07	F 12	F 18ND*	F 20RND*	F 25ND*	F 30
	t.	6 : 10	13 : 17	18 : 24	22 : 28	25 : 32	33 : 45
	Kg.	550	1240	1900	2250	2500	3150
A	mm.	470	660	800	800	870	950
B	mm.	1330	1720	1850	2200	1955	2370
C	mm.	330	410	470	470	570	580
D	mm.	140	220	300	300	300	300
X	t.	80	120	195	195	235	255
Y	t.	30	55	80	80	95	110
	t.	55	100	125	125	155	180
	bar	280	300	310	310	310	310
	l/min.	40	150	170	170	200	300
		/	/	/	H 360*	/	/
	bar	/	/	/	140	/	/
	l/min.	/	/	/	10	/	/
MAX Ø	mm.	20	30	40	40	40	50
		3/4" gas	1" gas	1" gas	1" gas	1" gas	1" 1/4 gas

(*) MODELLO FORNITO CON DENTI INTERCAMBIABILI IMBULLONATI / (**) BOLTED INTERCHANGEABLE TEETH VERSION FURNISHED

(*) MODÈLE FOURNIE AVEC LES DENTS INTERCHANGEABLES BOULONNÉS / (*) MODELO PROVISTO CON LOS DIENTES INTERCAMBIABLES ATORNILLADOS

(**) I PESI SOPRA DESCRITTI NON INCLUDONO LA SELLA ATTACCO. CARATTERISTICHE DI PRODOTTO E SPECIFICHE POSSONO VARIARE SENZA OBBLIGO DI PREAVVISO.

(**) THE ABOVE MENTIONED WEIGHTS DO NOT INCLUDE THE EXCAVATOR ATTACHMENT. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

(**) LOS PESOS INDICADOS NO COMPENDEN EL ENGANCHE EXCAVADORA. LAS CARACTERÍSTICAS DEL PRODUCTO Y LAS ESPECIFICACIONES PUEDEN VARIAR SIN OBLIGACIÓN DE PREAVISO.

(**) LES POIDS INDIQUÉS NE COMPRENENT PASS L'ATTACHE POUR LA PELLE. LES CARACTÉRISTIQUES ET LES SPÉCIFICATIONS DES PRODUITS PEUVENT ÊTRE MODIFIÉES SANS PRÉVIS.